
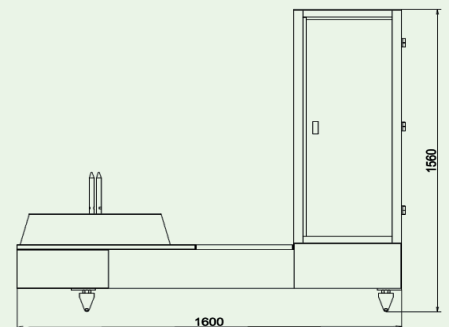


CHW-3580

Luggage Wrapping Machine



FEATURES

- Mainly used for luggage wrapping or case stretch wrapping at airport or warehouse, stations and hotels.
- PLC control.
- Operator adjusts vertical rods to secure case/luggage.
- Film tension control adjustment tension on the panel.
- Adjustable wrapping time.
- Soft Start / Stop and smooth wrapping prolongs machine's lifespan.
- Easy operation.
- Moveable by casters.
- Adjustable vertical rods for varies size luggages or cases.

SPECIFICATION

Model	CHW-3580
Power Supply	1φ/3φ, 220V/380V, 50/60Hz
Loading Weight	Max. 100kgs
Film Specification	PE film core I.D.: 76mm O.D.:250mm x L500mm
Rotating Speed	20 circle/min (adjustable)
Film Carriage Speed	0~5 meter/min (adjustable)
Packing Size	L: 180-350 X W:400-800 X H: 300-600mm
Machine Size	L1600 X W651 X H1560mm

• CHA Pack reserves the right to modify specification for quality development.



Chuen An Machinery Industrial Co., Ltd.




No.8, Wugong 7th Rd., Wufong Dist., Taichung City 41353, Taiwan
 Tel: +886-4-2331-8689 | Fax: +886-4-2331-9689 | <http://www.chuen-an.com>
 E-mail: chuenan.intsales@gmail.com , chuenan.chuenan@msa.hinet.net





CHW-0300

Horizontal Stretch Wrapping Machine



FEATURES

- PLC control, with display control panel.
- Soft start/stop.
- Tensioning adjusts by hand.
- Automatic put on film, break film, stick film.
- Low operating costs.
- Reliable performance, easy operation.
- The machine is ideal for long objects wrapping likes carpets, textiles, tubes, battens and other long sections.

SPECIFICATION




Model	CHW-0300
Power Supply	110V/220V/240V, 1 ϕ , 50/60Hz
Drive Method	Belt
Rotary Speed	100 RPM
Round Wrapping Capacity (For round products)	Dia.100-330mm
Wrapping Capacity (For square or rectangular)	Min. Width:100 mm Min. Height:50mm Max. Width:560 mm Max. Rectangle Diagonal:530mm
Wrapping Length	L300mm - Infinite
Film Width	76mm, 102mm, 127mm
Film Specification	Film core I.D.: 76mm O.D.:100-200 mm
Film Tension	Friction drive system (Adjustable)
Control System	PLC
Machine Size	L1310 X W1250 XH1800mm

• CHA Pack reserves the right to modify specification for quality development.



CHW-B1200

Robot Pallet Wrapper



FEATURES

- Safety system : stop right away when touch an obstacle.
- PLC control, with display control panel.
- Battery charger and battery indicator.
- Equipped with Pallet height sensor.
- Top and bottom layers adjustable.
- Up & Down or Up only wrapping programs.
- Supplied with 24V battery and charger.
- Film carriage driven by chain.
- 4 separate wrapping modes⁽¹⁾ Single cycle mode (only upward or only downward)⁽²⁾The standard mode (upward / downward)⁽³⁾Fixed height of wrapping rounds (only covering the top)⁽⁴⁾Fixed middle of wrapping rounds (only middle of reinforcing wrapping).
- Soft start / stop + emergency stop + adjustable rotation speed.
- No pallet size limit.
- Move easily.

SPECIFICATION

Model	CHW-B1200
Power Supply	1 ϕ , 110V/220V, 50/60Hz
Rotation Speed	Max. 90 M/min.
Wrapping Height	Max.2400mm
Min. Pallet Size	L700 X W700 X H730mm
Max. Pallet Size	Infinite
Film Tension	Adjustable
Film Specification	PE film core I.D.: 76mm, O.D.:250mm X L500mm
Control System	PLC
Machine Size	L1583 X W1233 X H2770mm

• CHA Pack reserves the right to modify specification for quality development.